




**Special
Operating Instructions
for the
Bell & Howell
483
Autoload®
Super 8
Projector**

The model 483 looks similar and operates exactly like the model 482 described in accompanying booklet except for the following additional features.

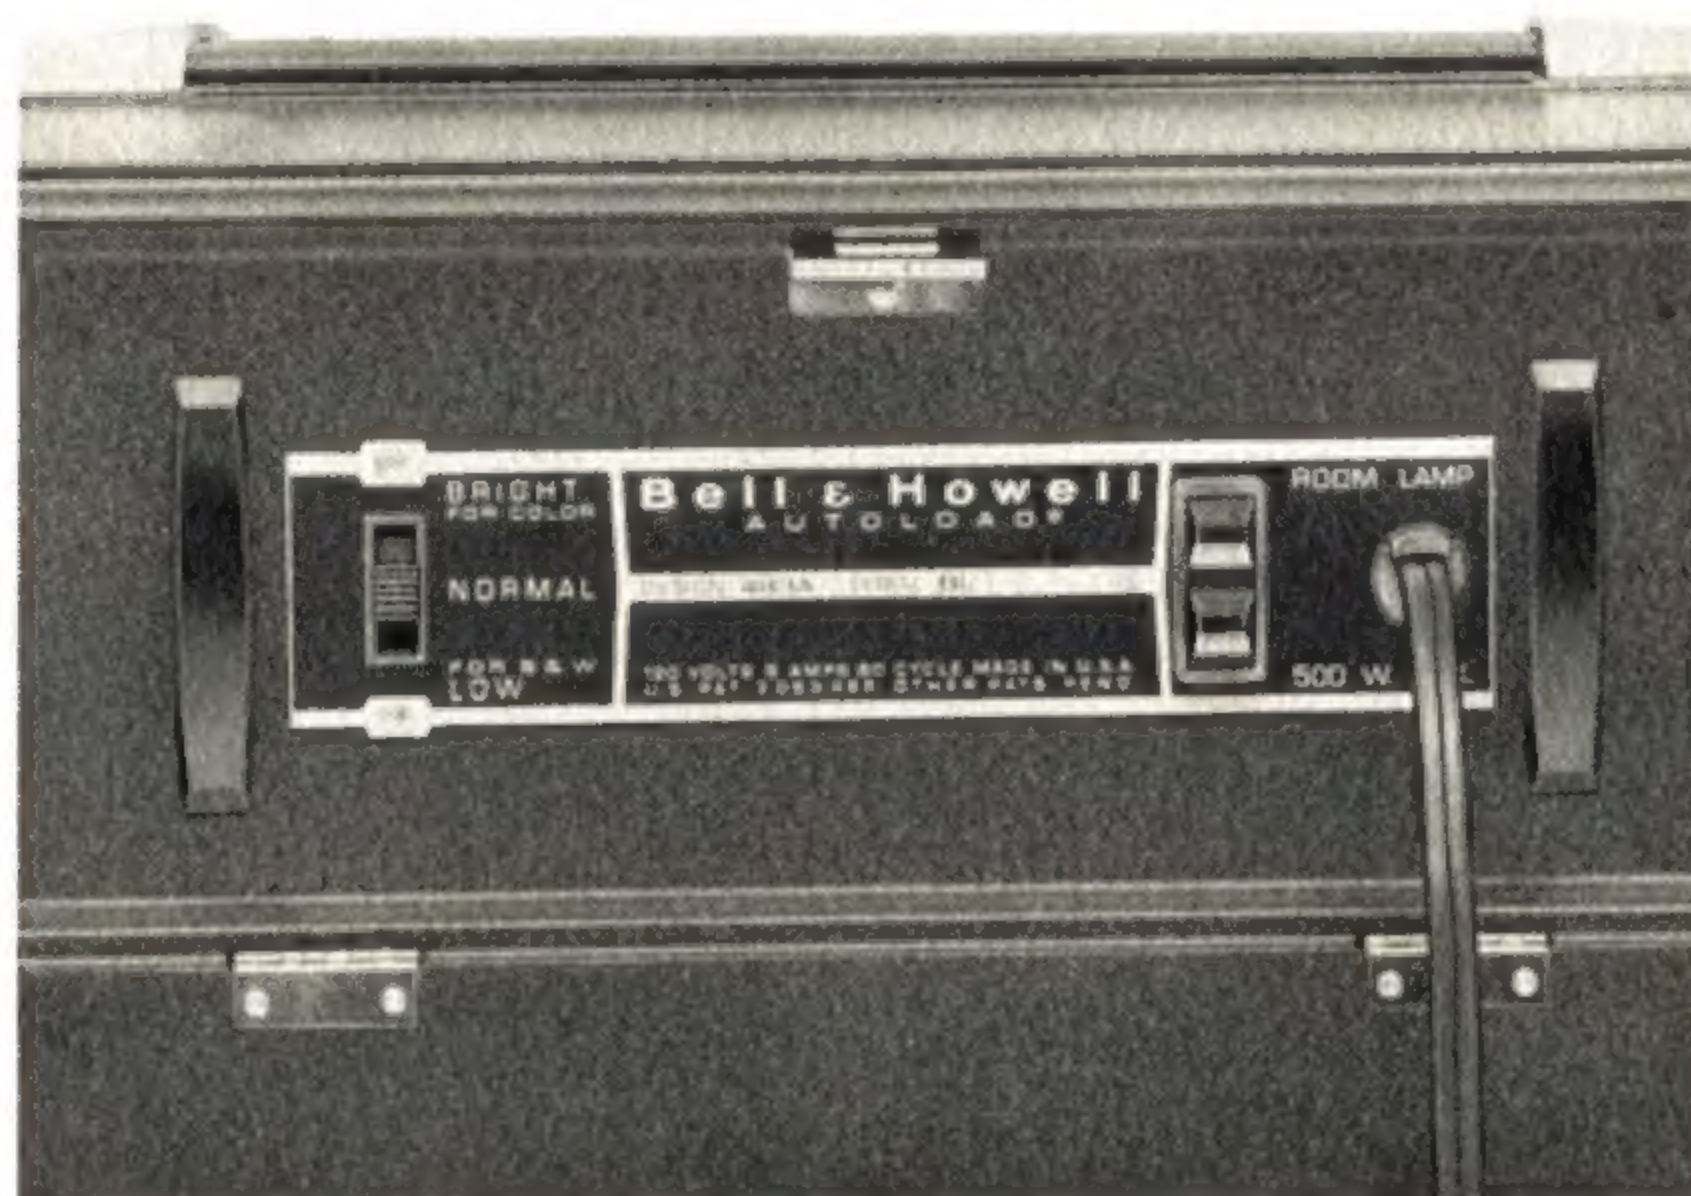

FAST 1" f/1.2 lens

ROOM LAMP RECEPTACLE—A Room Lamp Receptacle is located in the Rear Compartment of the Projector. When you plug a lamp into this receptacle it will turn off automatically when Projector Lamp is turned on and will turn on again when the Projector is turned off. The lamp plugged in must not exceed 500 watts.

BRIGHTNESS SWITCH—The Picture Brightness Switch located in the Rear Compartment lets you control picture brightness as follows:


BRIGHT—Used generally for Color Film in a room that cannot be completely darkened.

NORMAL—Used generally for Color Film in a completely darkened room. This position will prolong the life of the lamp.

LOW—Used for all Black & White Film.

NOTE: Use the “Low” position at all times will increase the life of the lamp up to 5 times. Be certain to check that the switch is snapped into the desired position.

**Special
Operating Instructions
for the
Bell & Howell
483
Autoload[®]
Super 8
Projector**

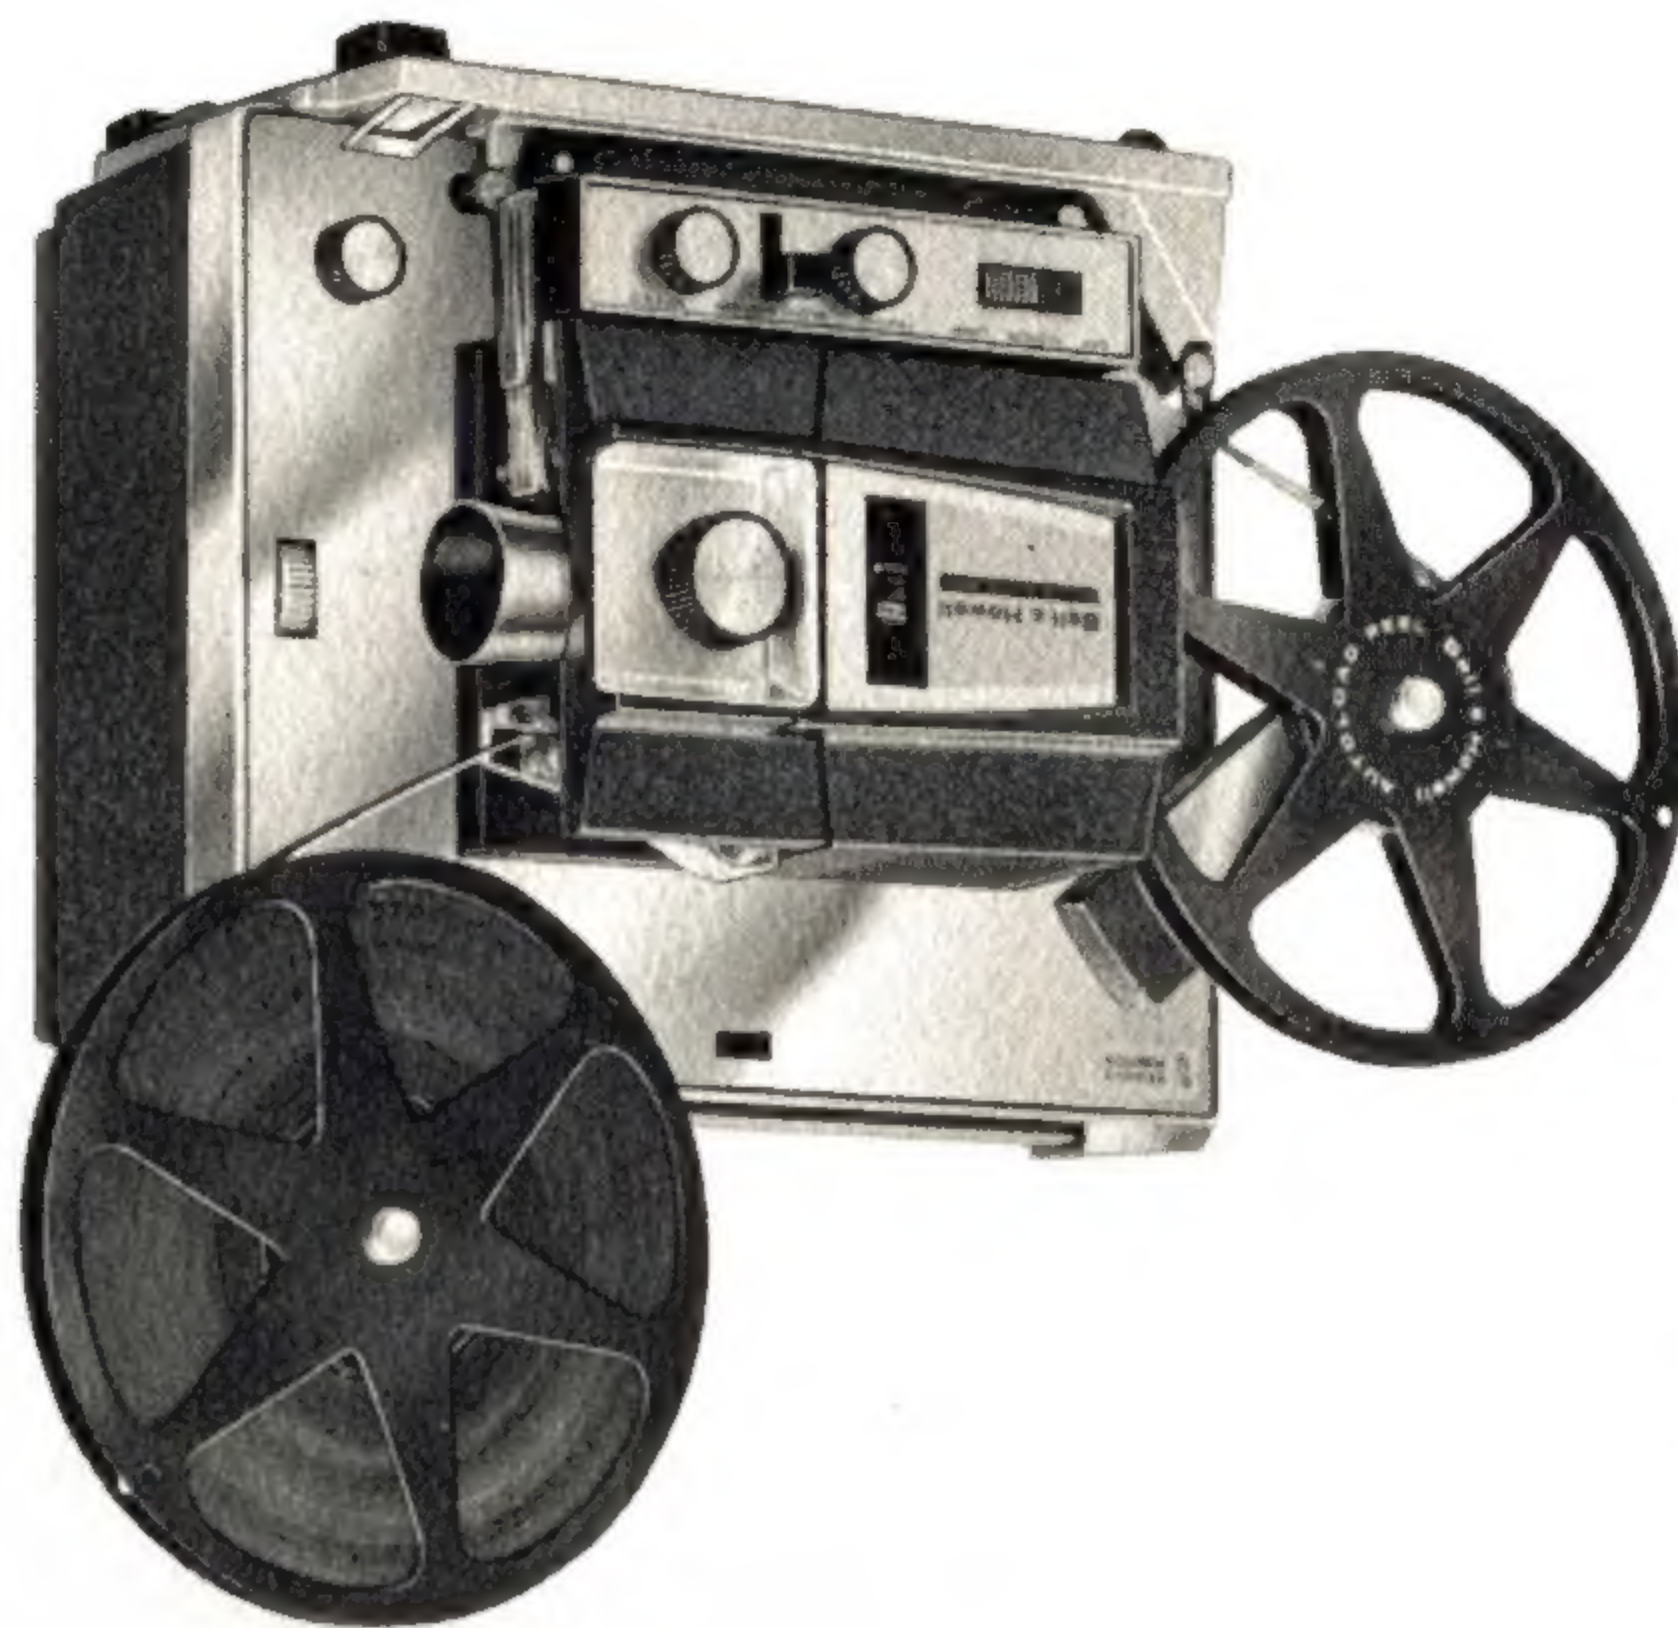

**Bell
&
Howell**

*finer products
through
imagination*

**QUALITY
ASSURANCE
APPROVED**



MODEL

INSPECTOR

F26670